


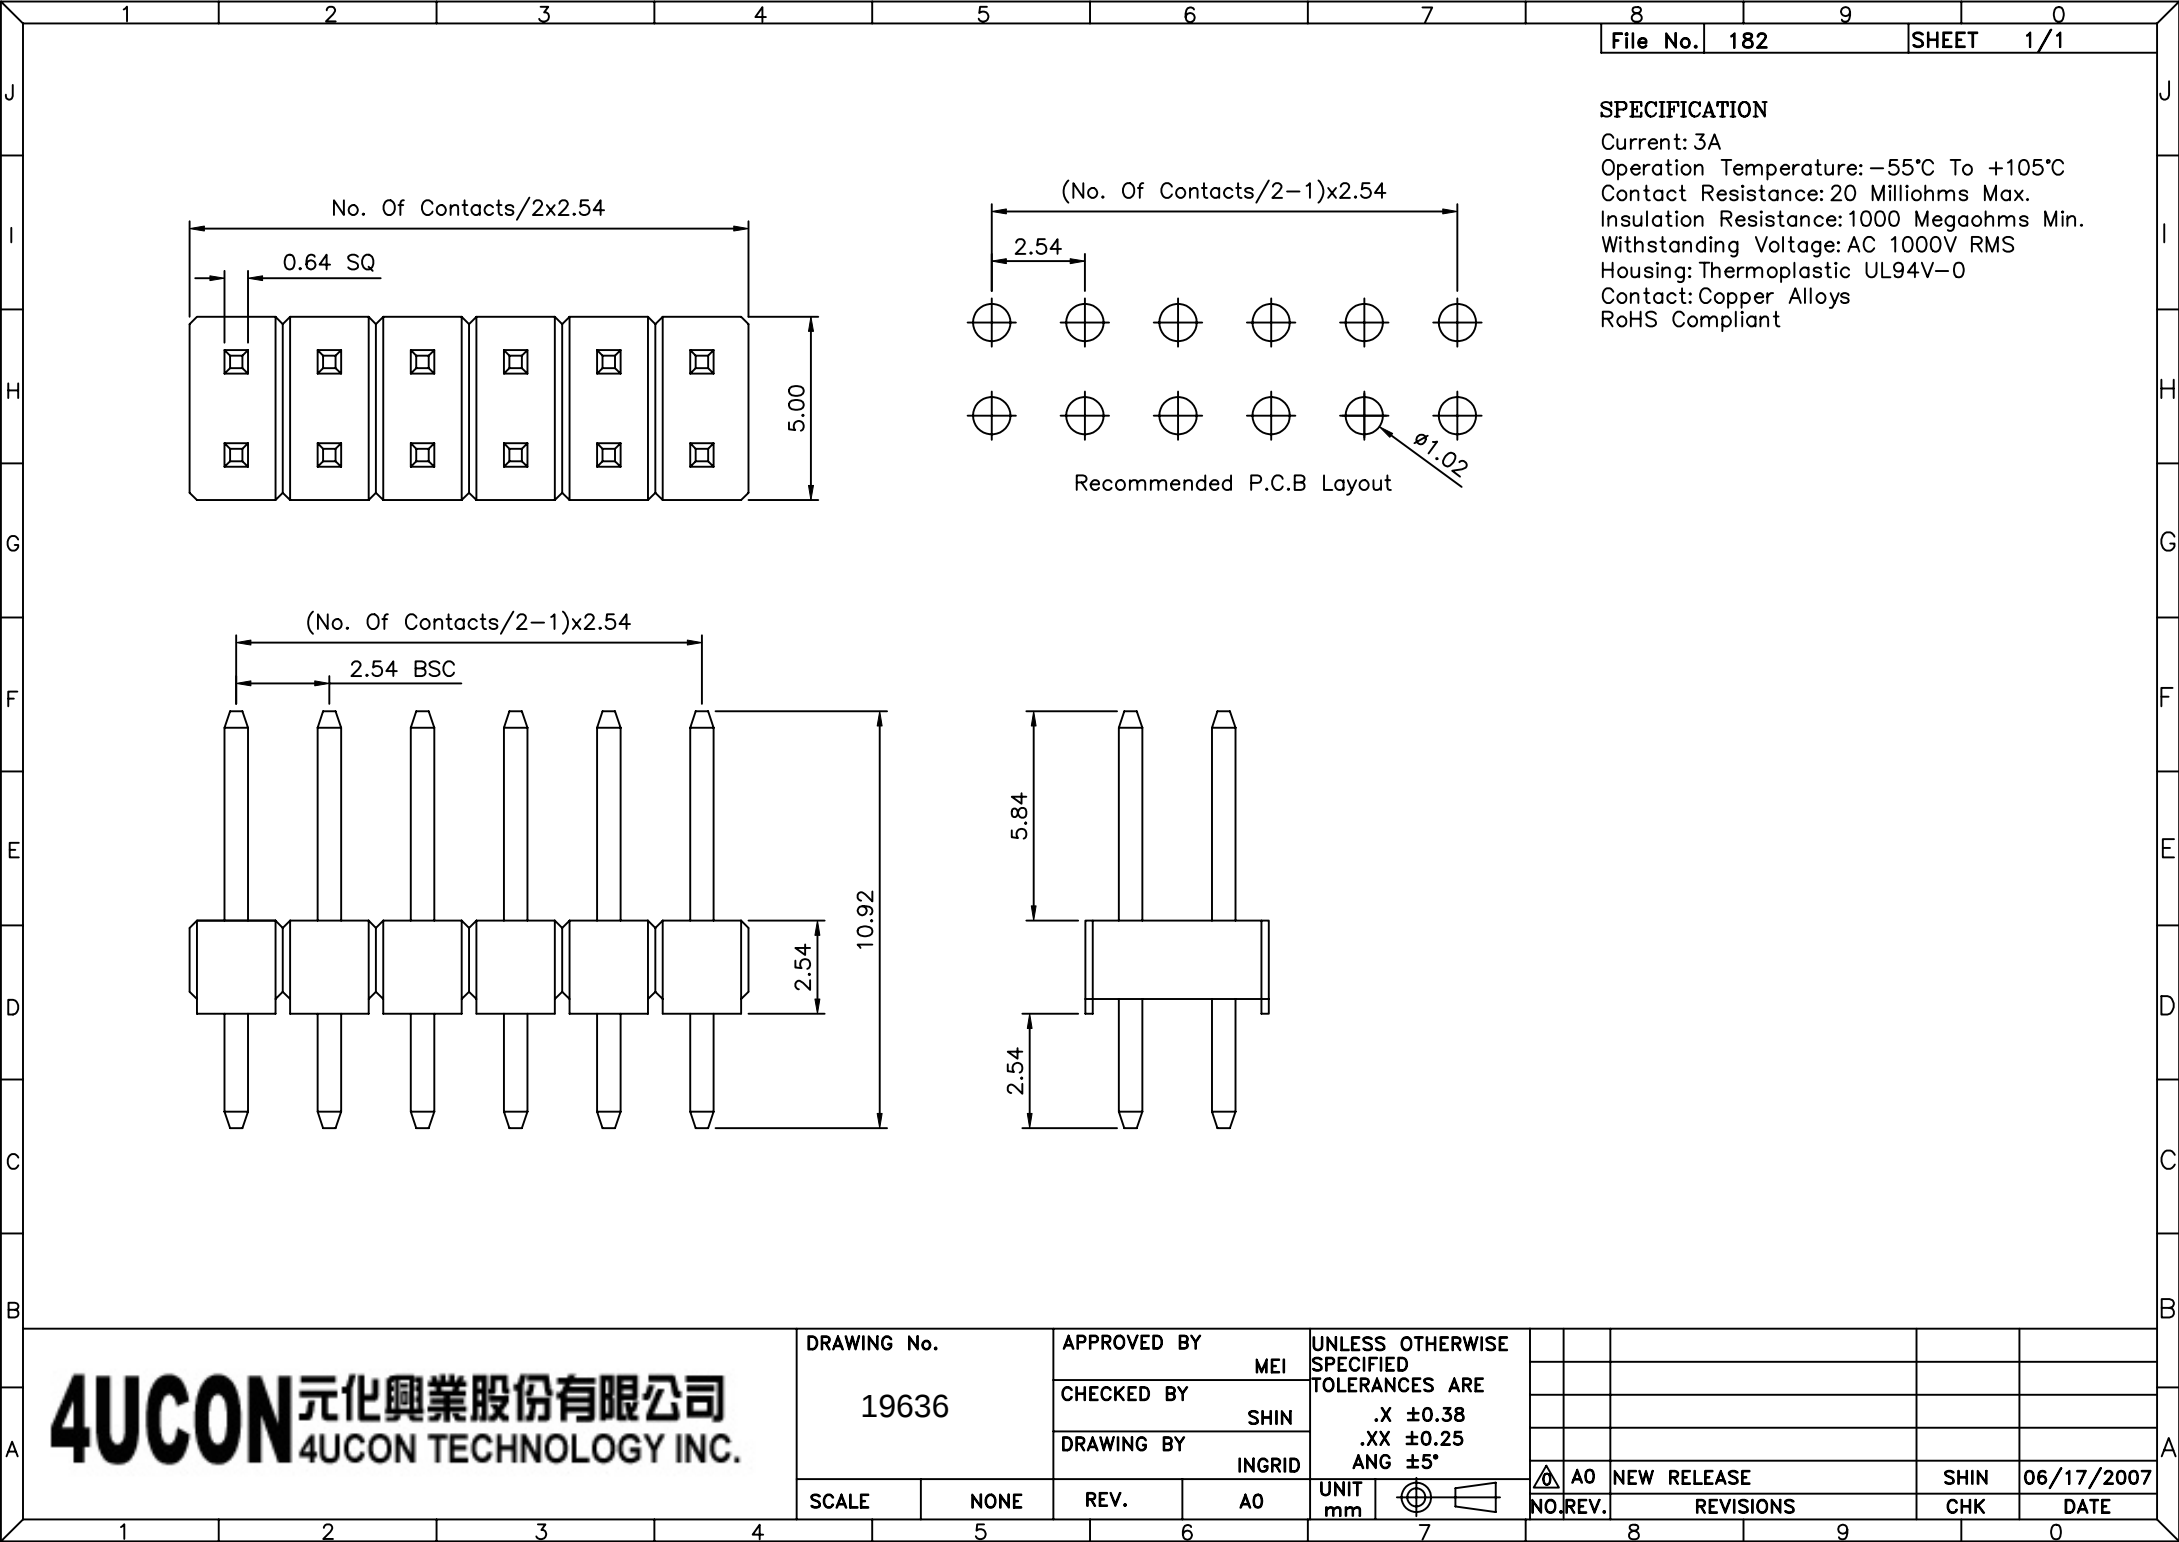

SPECIFICATION
Current: 3A
Operation Temperature: -55°C To +105°C
Contact Resistance: 20 Milliohms Max.
Insulation Resistance: 1000 Megaohms Min.
Withstanding Voltage: AC 1000V RMS
Housing: Thermoplastic UL94V-0
Contact: Copper Alloys
RoHS Compliant

4UCON元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 19636		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG ±5°						
		CHECKED BY SHIN								
		DRAWING BY INGRID								
SCALE	NONE	REV.	A0	UNIT mm			A0	NEW RELEASE	SHIN	06/17/2007
						NO. REV.	REVISIONS		CHK	DATE