




040-B




040-VR

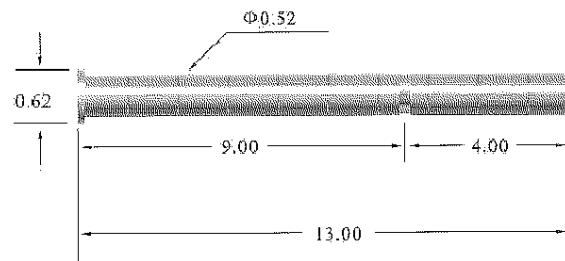


040-E




040-J



040-VRW

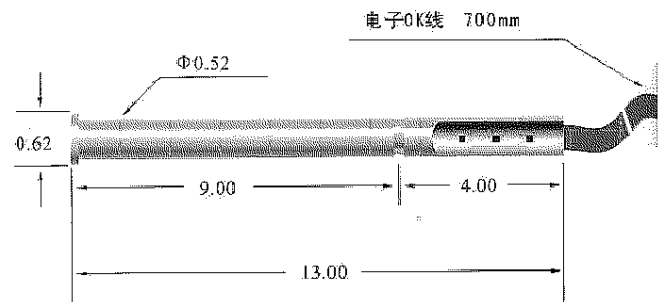

040-U3



(Recommended min-center): 0.80mm

(Spring force): 40gms

(Current rating): 3A

(Contact resistance): 50milliohms

(Full travel): 1.50mm

(Mounting hole size): 0.57mm